


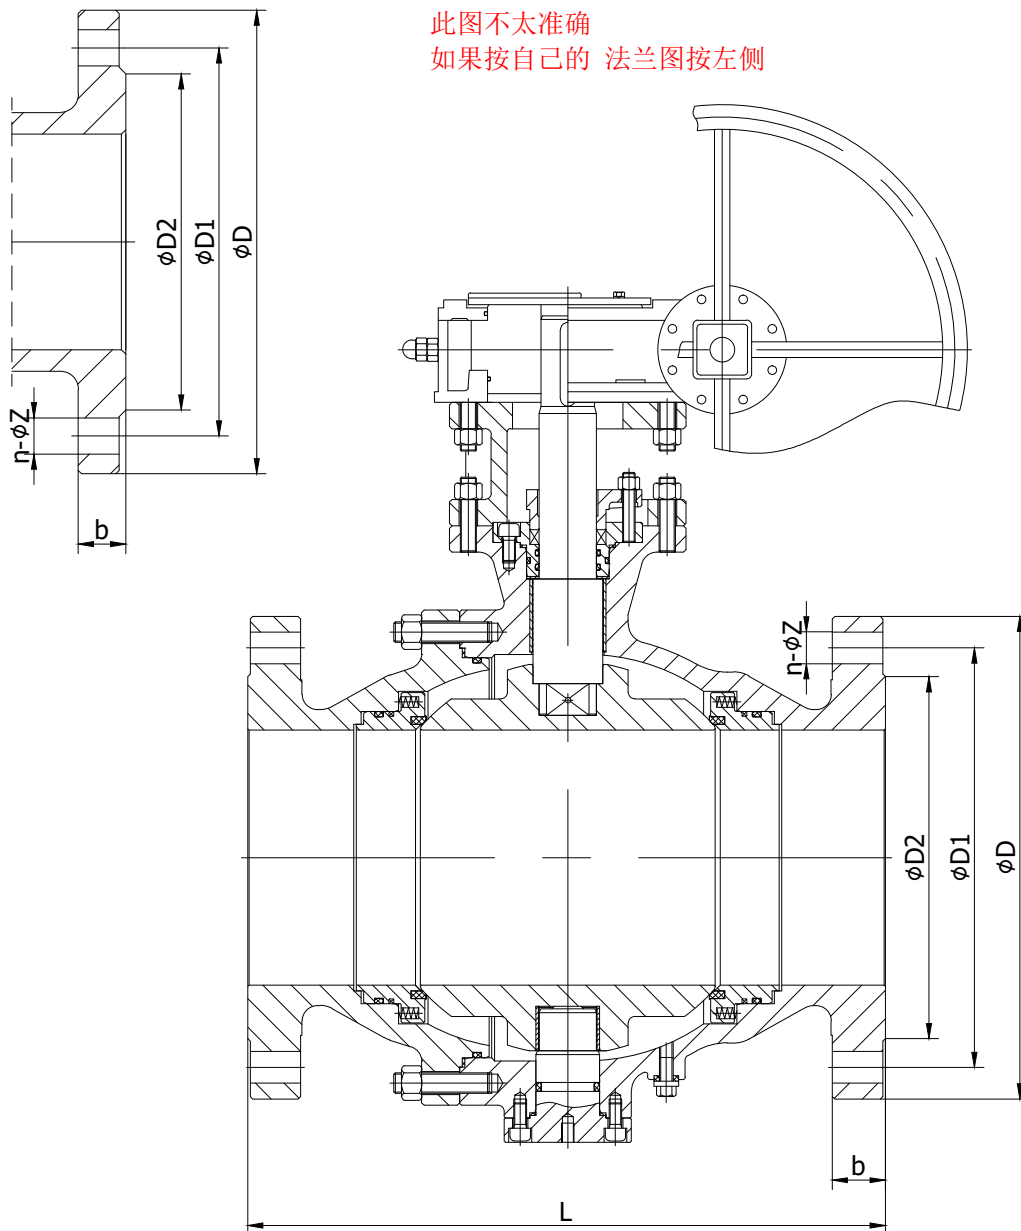

设计与制造标准	ASME B16.34 API 6D	JIS B2071
结构长度标准	ASME B16.10	JIS B2002
法兰连接标准	ASME B16.5	JIS B2220
检验与试验标准	API 598	JIS B2003

	DN	NPS	L	D	D1	D2	b	n-Z
150LB	50	2"	178	150	120.7	92.1	16	4-19
	65	2-1/2"	190	180	139.7	104.8	18	4-19
	80	3"	203	190	152.4	127.0	19	4-19
	100	4"	229	230	190.5	157.2	24	8-19
	125	5"	356	255	215.9	185.7	24	8-22
	150	6"	394	280	241.3	215.9	26	8-22
	200	8"	457	345	298.5	269.9	29	8-22
	250	10"	533	405	362.0	323.8	31	12-25
	300	12"	610	485	431.8	381.0	32	12-25
	350	14"	686	535	476.3	412.8	35	12-29
	400	16"	762	595	539.8	469.9	37	16-29
	450	18"	864	635	577.9	533.4	40	16-32
	500	20"	914	700	635.0	584.2	43	20-32
	600	24"	1067	815	749.3	692.2	48	20-35

	DN	NPS	L	D	D1	D2	b	n-Z
10K	50	2"	178	155	120	96	16	4-19
	65	2-1/2"	190	175	140	116	18	4-19
	80	3"	203	185	150	126	18	8-19
	100	4"	229	210	175	151	18	8-19
	125	5"	356	250	210	182	20	8-23
	150	6"	394	280	240	212	22	8-23
	200	8"	457	330	290	262	22	12-23
	250	10"	533	400	355	324	24	12-25
	300	12"	610	445	400	368	24	16-25
	350	14"	686	490	445	413	26	16-25
	400	16"	762	560	510	475	28	16-27
	450	18"	864	620	565	530	30	20-27
	500	20"	914	675	620	585	30	20-27
	600	24"	1067	795	730	690	32	24-33

没有300LB尺寸表 提供10K