



产品综合选型手册

提供管道阀门技术整体解决方案
Provide overall solution of pipeline valve technology



正拓阀门有限公司
ZHENG TUO VALVE CO., LTD.

地址：温州市龙湾区永中街道度山路178号
Add: No.178, Dushan Road, Yongzhong Street, Longwan District,
Wenzhou City, Zhejiang, China

电话(Tel): 0577-86913387 86885400 86921137 86921136
传真(Fax): 0577-86913377 邮编(P.C): 325024
Http: //www.ztovalve.com
E-mail: zhengtuo@ztovalve.com



扫一扫
了解更多详情.....

采用生态纸印刷 Adopt Ecological Paper To Print
© 正拓企业(ZHENG TUO ENTERPRISE)版权所有 策划设计: PEACE ADVERTISING Tel: 0577-86858181 13957700307

正拓阀门有限公司
ZHENG TUO VALVE CO., LTD.

ABOUT US

关于我们



Zhengtuo Valve Co., LTD. (hereinafter referred to as "Zhengtuo") is a professional R & D manufacturer of complete sets of valves under strict working conditions such as flange and thread, as well as a comprehensive service provider of valves in the whole field. Headquartered in Wenzhou is Longwan District. Zhengtuo has been engaged in the valve industry for many years, with a registered capital of 51.88 million yuan. The company focuses on improving the manufacturing capacity and innovation ability of special valves under harsh working conditions, and is committed to providing customers with a set of fluid control solutions. It is a large-scale valve enterprise integrating scientific research and development, test and testing, manufacturing and sales.

The company's products are mainly 6 categories, more than 500 specifications. On the basis of conventional valves, the company has developed more than ten kinds of special valve products, such as special products. It is widely used in extremely strict working conditions, including high temperature up to 1000° C, high pressure 2500LB, ultra-low temperature -196° C, high particles (such as mining, coal chemical industry, chemical agent and other particle transportation occasions). Main materials: carbon steel, forged steel, stainless steel, chrome-molybdenum steel, low temperature steel, duplex steel, Hastelloy C, Monel, etc. Products widely cover water, chemical, coal chemical, power plant, metallurgy, heat, paper, water conservancy, municipal building, fire and other industries.

2000+

超过2000次服务经验

800+

800多个客户与案例

20+

20余种专利和证书

了解更多



正拓阀门有限公司(以下简称“正拓”),是法兰和螺纹等严苛工况成套阀门的专业研发制造商,也是全领域行业阀门综合性服务商。总部位于温州是龙湾区。正拓从事阀门行业多年,现注册资金5188万元,公司专注于提高苛刻工况环境下专用阀门的制造能力与创新能力,致力于为客户提供一整套流体控制解决方案,是一家集科研开发、试验检测、制造销售为一体的大型阀门企业。

公司产品主要为6大类,500多个规格品种。在常规阀类的基础上,公司研发特种产品等十几种特殊阀门产品。广泛应用于极其严苛的工况环境,其中应用环境高温可达1000°C,高压2500LB,超低温-196°C,高颗粒(如矿山,煤化工、化工化剂等颗粒输送场合)。主要材质:碳钢、锻钢、不锈钢、铬钼钢、低温钢、双相钢、哈氏C、蒙乃尔等。产品广泛覆盖水务、化工、煤化工、电厂、冶金、热力、造纸、水利、市政楼宇、消防等行业。

公司拥有完善的企业标准化管理体系以及现代化电子检测系统,运用ERP等系统对工厂进行管理。确保企业以专业化、自动化、规范化的管理模式进行生产。公司坚持以科技创新为企业发展先导,设立了阀门研发设计中心,三维模拟制造设计系统,特种阀门试验平台(高温阀门热态试验平台、低温阀门深冷试平台),并与兰州理工大学等科研单位进行长期研发合作,不断优化产品结构和性能,保证阀门研发生产的质量和速度。

公司先后荣获获得特种设备制造许可证证书、涉及饮用水卫生安全产品卫生许可证、SIL 3 产品安全认证、欧盟CE认证、两化融合管理体系认证,ISO国际质量、环境、职业健康、AAA信用企业证书、重合同守信用企业等30多个证书。正拓阀门有限公司系中国阀门城龙湾阀门协会副会长单位。

同时为中石化、中石油、五大电力集团、首钢、鞍钢、中铁、华陆以及各省市水利水务集团、热力集团等大型企业集团的合格供应商。公司积极参与国家倡导的一带一路经济建设,产品远销欧美、中东、东南亚、非洲等十几个国家和地区。优质的产品、快捷的售后服务赢得广大海内外客户的赞誉和信赖。公司坚持“以质量求生存、以信誉求发展、以科技求创新”的经营理念,诚信务实、敢于超前,力求把公司建设成为具有“正拓”特色的现代化工业型企业。

正拓诚邀广大用户携手合作,互利双赢,共创辉煌!

The company has a perfect enterprise standardized management system and modern electronic testing system, the use of ERP and other systems for factory management. Ensure that the enterprise in a professional, automated, standardized management mode for production. Companies adhere to scientific and technological innovation for enterprise development, set up valve research and development design center, three-dimensional simulation of manufacturing system design, special valve test platform (high temperature valves, cryogenic valves, cryogenic thermal state test platform test platform), and compared with lanzhou university of technology and other scientific research units research and development of long-term cooperation, constantly optimize the product structure and performance, ensure the quality and speed of the valves research and development production.

The company has been awarded more than 30 certificates, such as special equipment manufacturing license certificate, Hygiene license for drinking water sanitation and safety products, SIL 3 product safety certification, European CE certification, two integrated management system certification, ISO international quality, environment, occupational health, AAA credit enterprise certificate, contract honoring and credit keeping enterprise, etc. Zhengtuo Valve Co., Ltd. is the vice president of Longwan Valve Association of China valve City.

At the same time for Sinopec, petrochina, five power groups, Shougang, Anshan Iron and Steel, China Railway, Hualu and other provinces and cities water resources group, heat group and other large enterprise groups qualified suppliers. The company actively participates in the Belt and Road economic construction advocated by the country, and its products are exported to more than a dozen countries and regions such as Europe, America, the Middle East, Southeast Asia and Africa. High quality products, quick after-sales service to win the majority of customers at home and abroad praise and trust. The company adheres to the business philosophy of "survival by quality, development by reputation, innovation by science and technology", honesty and pragmatism, dare to advance, and strive to build the company into a modern industrial enterprise with "Zhengtuo" characteristics.

Zhengtuo sincerely invites the vast number of users to work together, mutual benefit and win-win, create brilliant!

TECHNOLOGY & RESEARCH

技术研发

为用户提供高品质产品是我们一直的目标

**TO PROVIDE USERS WITH HIGH-QUALITY
PRODUCTS IS OUR GOAL**

我们希望通过我们完善的设计、研发和售后服务确保每一台产品在有效使用期内充分发挥各项设计性能指标。运用崭新的管理概念及强大的专业技术力量，生产出符合国际标准的高品质终极产品。

We are desirous of that all products can exert their performances in effective life by our perfect design, manufacture and service. Make sure of completely new managing concept and strong professional technology force to produce high quality products that confirm with international standard.



QUALITY OF THE SITE

品质现场

完美的品质 取源于制造手段的先进

PERFECT QUALITY IS ORIGINATED FROM ADVANCED MANUFACTURING MEANS

严谨、务实、永不松懈的工作作风，植根于正拓的每一道生产工序之中。检验员高度负责的心态溶于每一个部件中，加上最先进的检测设备和严格的科学化管理，使每一个生产的成品经得起顾客的精心挑选。正拓人庄严承诺让生产的每一个产品都得100分。



Rigorous, pragmatic, never slack work style, rooted in zhengtuo's every production processes. Inspector highly responsible attitude soluble in each component, plus the most advanced testing equipment and strict scientific management, to make every products stand customer selected. we are commitment to perfect and excellent.

QUALITY ASSURANCE

质量保障

精益求精 品质先行

KEEP IMPROVING WITH QUALITY RANKING TH FIRST

公司拥有先进的设备及检验仪器，精良的工艺以及严格完善的质量管理体系，并具有专业技术精英和领先的科技队伍，充分利用新技术、新工艺、新材料保证产品的稳定性和可靠性。产品质量取源于制造手段的先进、精品意识源于不断的创新。不管世界如何变化，正拓人精益求精的执着精神不变。

The rigorous, practical and unremitting working attitude governs every production procedure in ZHENG TUO. All our inspectors take high responsibility on every component. Plus, the most advanced testing facilities and strict scientific management make every product a fine choice for our customers. People of ZHENG TUO solemnly promise that all of products are completely qualified.



ZHENG TUO TEAM

正拓团队

销售团队协作 缔造完美品质

SALES TEAM COOPERATION TO CREATE PERFECT QUALITY

架构精密、分工精细，合作精诚，为正拓的每一次飞跃奠定了量的基础。科学而有效的管理。果断而及时的决策，全面而及时的信息反馈，使正拓永远赢得市场先机。运筹帷幄之中，决胜于千里之外，成功跨越一道道门槛。精华的沉淀，沉稳的面对，让正拓乘风破浪，扬帆远航。

“永不自满，精益求精，追求卓越”已成为正拓全体职员共同的心声。

Precise framework, meticulous labor division and sincere cooperation, Have laid a solid foundation for ZHENG TUO severy leap. Scientific and effective management, firm and timely decision-making, all-round and fresh information feedback, have made ZHENG TUO win market opportunity in advance. Work out splendid plans to win Victories in battles a thousand miles away, and smoothly leap over each doorsill with sediment of essence and cool-minded attitude to work, ZHENG TUO will plow the waves. "Ever to beself-contented, keeping improving" seeking for brilliance has become a common wish of ZHENG TUO staff.



总经理：王 建 坡





正拓阀门
ZHENG TUO VALVE

营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.

营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.

正拓阀门
ZHENG TUO VALVE



QUALIFICATION

企业资质





正拓阀门
ZHENG TUO VALVE

营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.
●●●●●●●●



营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.
●●●●●●●●

正拓阀门
ZHENG TUO VALVE



气动法兰球阀
Pneumatic Actuator 2-PC
flanged ball valve



气动法兰三通球阀
Pneumatic Actuator 3-way
flanged ball valve



气动法兰罐底球阀
Pneumatic Actuator Flanged
end tank bottom valve



美标法兰闸阀
Gate valve flange end
ansi class 150/300



国标法兰闸阀
Gate valve flange end
GB PN16/40



不锈钢软密封闸阀
Stainless steel soft-seal
gate valves



电动快装罐底球阀
Electric quick canning
bottom ball valve



电动法兰球阀
Electric flanged ball valve



国标高平台法兰球阀
GB Standard 2-PC Flanged ball
valve with ISO5211 Direct
mounting pad



美标法兰截止阀
globe valve flange end
ansi class 150/300



国标法兰截止阀
Globe valve flange end
GB PN16/40



暗杆法兰闸阀
Non-rising stem
flanged gate valve



三片式高平台法兰球阀
3-PC Flanged ball valve with
ISO5211 Direct mounting pad



气动软密封蝶阀
Pneumatic soft seal
butterfly valve



气动膨胀蝶阀
Pneumatic expansion
butterfly valve



高平台对夹球阀
High platform clamp ball valve



过滤器
Y-strainer Flange End



国标法兰旋启式止回阀
swing check valve flange end
GB PN16/40



正拓阀门
ZHENG TUO VALVE

营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.
●●●●●●●●



营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.
●●●●●●●●

正拓阀门
ZHENG TUO VALVE



二片式内螺纹球阀
2-PC Female thread
ball valve



三片式快装球阀
3-PC Quick ball valve



气动三片式内螺纹球阀
3-PC Pneumatic ball valve
with internal thread



包胶对夹式止回阀
Package adhesive check valve



对夹止回阀
wafer Swing type check valve



日标拉柄式底阀
JIS Foot valve



三通高平台螺纹球阀
3-way ball valve thread end
Direct mounting pad



三通高平台螺纹球阀
3-way ball valve thread end
Direct mounting pad



四通快装球阀
3-way quick ball valve



日标带旁通无声止回阀
JIS Silent check valve with
by pass



水锤吸纳器
Water hammer arrester



水用减压阀
water pressure reducing valve



三片式焊接高平台球阀
3-PC Weld end ball valve with
ISO5211 Directmounting pad



三片式焊接加长杆球阀600LB
3-PC Weld end ball valve
extension stem 600LB



内螺纹旋启式止回阀
swing check valve thread end
socket weld end



内螺纹截止阀
Female thread end globe valve



内螺纹截止阀
Globe Valve Thread End
Socket Weld End



内螺纹闸阀
Female thread end gate valve



正拓阀门
ZHENG TUO VALVE

营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.
●●●●●●●●


营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.
●●●●●●●●



正拓阀门
ZHENG TUO VALVE

国标高平台球阀PN16

National level platform ball valve Pn16




设计与制造标准 Manufacturing standard	GB/T 12237
结构长度标准 Length standard	GB/T 12221
法兰连接标准 Connection standard	HG/T 20592
检验与试验标准 Inspection and test standards	GB/T 26480

零件Part Name	材料Material		
手柄Handle	201	201	201
压盖法兰Gland Flange	CF8	CF8	CF8
填料盖Gland	304	304	304
填料Packing	PTFE	PTFE	PTFE
O型圈 O-ring	VITON	VITON	VITON
垫片Gasket	PTFE	PTFE	PTFE
阀杆Stem	304	304	316
阀座Seat	PTFE	PTFE	PTFE
阀体Body	WCB	CF8	CF8M
球体Ball	304	304	316
垫片Gasket	PTFE	PTFE	PTFE
螺母Nut	2H	8	8
螺栓Blot	B7	B8	B8
阀盖Bonnet	WCB	CF8	CF8M

DN	NPS	L	H	W
15	1/2"	130	82	150
20	3/4"	130	88	150
25	1"	140	100	180
32	1-1/4"	165	110	180
40	1-1/2"	165	122	210
50	2"	203	130	210
65	2-1/2"	222	165	260
80	3"	241	178	260
100	4"	305	195	300
125	5"	356	240	600
150	6"	394	280	600
200	8"	457	320	800

美日标法兰球阀10K 150LB

American and Japanese standard flange ball valve 10K 150LB




设计与制造标准 Manufacturing standard	ASME B16.34	JIS B2071
结构长度标准 Length standard	ASME B16.10	JIS B2002
法兰连接标准 Connection standard	ASME B16.5	JIS B2220
检验与试验标准 Inspection and test standards	API 598	JIS B2003

零件Part Name	材料Material		
垫片Gasket	PTFE	PTFE	PTFE
填料Packing	PTFE	PTFE	PTFE
螺栓Blot	B7	B8	B8
手柄Handle	CS	201	201
Stopper	201	201	201
压盖法兰Gland Flange	WCB	CF8	CF8
阀杆Stem	304	304	316
阀盖Bonnet	WCB	CF8	CF8M
螺母Nut	2H	8	8
螺栓Blot	B7	B8	B8
垫片Gasket	PTFE	PTFE	PTFE
球体Ball	304	304	316
阀座Seat	PTFE	PTFE	PTFE
阀体Body	WCB	CF8	CF8M

DN	NPS	L	H	W
15	1/2"	108	78	130
20	3/4"	117	80	130
25	1"	127	90	180
32	1-1/4"	140	95	180
40	1-1/2"	165	112	215
50	2"	178	120	215
65	2-1/2"	190	140	275
80	3"	203	155	275
100	4"	229	170	320
125	5"	356	265	600
150	6"	394	285	600
200	8"	457	340	800

高平台对夹球阀PN16

High platform to clamp ball valve Pn16

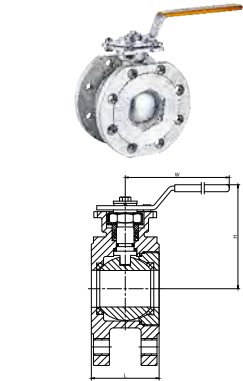


设计与制造标准 Manufacturing standard	GB/T 12237
结构长度标准 Length standard	制造商manufacturer
法兰连接标准 Connection standard	HG/T 20592
检验与试验标准 Inspection and test standards	GB/T 26480

零件Part Name	材料Material		
手柄HandLe	201	201	201
螺母Nut	304	304	304
填料盖Gland	304	304	304
填料Packing	PTFE	PTFE	PTFE
O型圈 O-ring	VITON	VITON	VITON
阀杆Stem	304	304	316
垫片Gasket	PTFE	PTFE	PTFE
球体Ball	304	304	316
阀座Seat	PTFE	PTFE	PTFE
阀盖Bonnet	WCB	CF8	CF8M
阀体Body	WCB	CF8	CF8M

DN	NPS	L	H	W
15	1/2"	39	90	135
20	3/4"	44	95	135
25	1"	50	108	170
32	1-1/4"	50	118	170
40	1-1/2"	65	130	200
50	2"	73	140	200
65	2-1/2"	94	162	250
80	3"	118	175	250
100	4"	140	190	320
125	5"	195	220	320
150	6"	237	275	600

高平台三通球阀PN16

High platform three-way ball valve Pn16




设计与制造标准 Manufacturing standard	GB/T 12237
结构长度标准 Length standard	制造商manufacturer
法兰连接标准 Connection standard	HG/T 20592
检验与试验标准 Inspection and test standards	GB/T 26480

零件Part Name	材料Material		
螺栓Blot	B7	B8	B8
螺母Nut	2H	8	8
压盖法兰Gland Flange	WCB	CF8	CF8
填料Packing	PTFE	PTFE	PTFE
阀杆Stem	304	304	316
螺栓Blot	B7	B8	B8
螺母Nut	2H	8	8
垫片Gasket	PTFE	PTFE	PTFE
球体Ball	304	304	316
阀座Seat	PTFE	PTFE	PTFE
阀体Body	WCB	CF8	CF8M
阀盖Bonnet	WCB	CF8	CF8M

DN	NPS	L	H
15	1/2"	171	61
20	3/4"	172	61
25	1"	192	71
32	1-1/4"	200	75
40	1-1/2"	230	85
50	2"	270	93
65	2-1/2"	300	120
80	3"	325	137

美日标高平台球阀10K 150LB

Us-japan level platform ball valve 10K 150LB

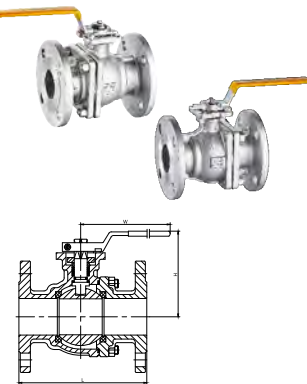


设计与制造标准 Manufacturing standard	ASME B16.34	JIS B2071
结构长度标准 Length standard	ASME B16.10	JIS B2002
法兰连接标准 Connection standard	ASME B16.5	JIS B2220
检验与试验标准 Inspection and test standards	API 598	JIS B2003

零件Part Name	材料Material		
手柄Handle	201	201	201
压盖法兰Gland Flange	CF8	CF8	CF8
填料盖Gland	304	304	304
填料Packing	PTFE	PTFE	PTFE
O型圈 O-ring	VITON	VITON	VITON
垫片Gasket	PTFE	PTFE	PTFE
阀杆Stem	304	304	316
阀座Seat	PTFE	PTFE	PTFE
阀体Body	WCB	CF8	CF8M
球体Ball	304	304	316
垫片Gasket	PTFE	PTFE	PTFE
螺母Nut	2H	8	8
螺栓Blot	B7	B8	B8
阀盖Bonnet	WCB	CF8	CF8M

DN	NPS	L	H	W
15	1/2"	108	82	150
20	3/4"	117	88	150
25	1"	127	100	180
32	1-1/4"	140	110	180
40	1-1/2"	165	122	210
50	2"	178	130	210
65	2-1/2"	190	165	260
80	3"	203	178	260
100	4"	229	195	300
125	5"	356	240	600
150	6"	394	280	600
200	8"	457	320	800

美日标固定球阀10K 150LB

American and Japanese standard fixed ball valve 10K 150LB

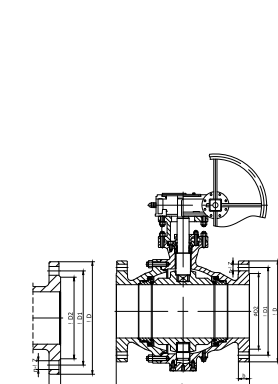


设计与制造标准 Manufacturing standard	ASME B16.34 API 6D	JIS B2071
结构长度标准 Length standard	ASME B16.10	JIS B2002
法兰连接标准 Connection standard	ASME B16.5	JIS B2220
检验与试验标准 Inspection and test standards	API 598	JIS B2003

150LB									
DN	NPS	L	D	D1	D2	b	n-Z		
50	2"	178	150	120.7	92.1	16	4-19		
65	2-1/2"	190	180	139.7	104.8	18	4-19		
80	3"	203	190	152.4	127.0	19	4-19		
100	4"	229	230	190.5	157.2	24	8-19		
125	5"	356	255	215.9	185.7	24	8-22		
150	6"	394	280	241.3	215.9	26	8-22		
200	8"	457	345	298.5	269.9	29	8-22		
250	10"	533	405	362.0	323.8	31	12-25		
300	12"	610	485	431.8	381.0	32	12-25		
350	14"	686	535	476.3	412.8	35	12-29		
400	16"	762	595	539.8	469.9	37	16-29		
450	18"	864	635	577.9	533.4	40	16-32		
500	20"	914	700	635.0	584.2	43	20-32		
600	24"	1067	815	749.3	692.2	48	20-35		

10K									
DN	NPS	L	D	D1	D2	b	n-Z		
50	2"	178	155	120	96	16	4-19		
65	2-1/2"	190	175	140	116	18	4-19		
80	3"	203	185	150	126	18	8-19		
100	4"	229	210	175	151	18	8-19		
125	5"	356	250	210	182	20	8-23		
150	6"	394	280	240	212	22	8-23		
200	8"	457	330	290	262	22	12-23		
250	10"	533	400	355	324	24	12-25		
300	12"	610	445	400	368	24	16-25		
350	14"	686	490	445	413	26	16-25		
400	16"	762	560	510	475	28	16-27		
450	18"	864	620	565	530	30	20-27		
500	20"	914	675	620	585	30	20-27		
600	24"	1067	795	730	690	32	24-33		

美日标闸阀10K 150LB

American and Japanese standard gate Valve 10K 150LB




设计与制造标准 Manufacturing standard	ASME B16.34	JIS B2071
结构长度标准 Length standard	ASME B16.10	JIS B2002
法兰连接标准 Connection standard	ASME B16.5	JIS B2220
检验与试验标准 Inspection and test standards	API 598	JIS B2003

零件Part Name	材料Material	
手轮Hand Wheel	DUCTILE IRON	DUCTILE IRON
阀杆螺母Stem Nut	COPPER	COPPER
螺栓Blot	B8	B8
螺母Nut	8	8
压盖法兰Gland Flange	CF8	CF8
填料Packing	PTFE	PTFE
阀盖Bonnet	CF8	CF8M
阀杆Stem	304	316
螺母Nut	8	8
螺栓Blot	B8	B8
垫片Gasket	PTFE	PTFE
阀体Body	CF8	CF8M
Wedge	CF8	CF8M

DN	NPS	L
50	2"	178
65	2-1/2"	190
80	3"	203
100	4"	229
125	5"	254
150	6"	267
200	8"	292
250	10"	330
300	12"	356
350	14"	381

美日标截止阀10K 150LB

American and Japanese standard globe Valve 10K 150LB



设计与制造标准 Manufacturing standard	ASME B16.34	JIS B2071
结构长度标准 Length standard	ASME B16.10	JIS B2002
法兰连接标准 Connection standard	ASME B16.5	JIS B2220
检验与试验标准 Inspection and test standards	API 598	JIS B2003

零件Part Name	材料Material	
手轮Hand Whee	DUCTILE IRON	DUCTILE IRON
阀杆螺母Stem Nut	COPPER	COPPER
压盖法兰Gland Flange	CF8	CF8
填料Packing	PTFE	PTFE
螺母Nut	8	8
螺栓Blot	B8	B8
垫片Gasket	PTFE	PTFE
阀盖Bonnet	CF8	CF8M
阀杆Stem	304	316
阀帽Disc	304	316
阀体Body	CF8	CF8M

DN	NPS	L	H	W
15	1/2"	108	200	100
20	3/4"	117	205	120
25	1"	127	220	140
32	1-1/4"	140	240	150
40	1-1/2"	165	260	160
50	2"	203	295	220
65	2-1/2"	216	325	220
80	3"	241	360	240
100	4"	292	420	280
125	5"	256	460	350
150	6"	406	500	400
200	8"	495	550	450
250	10"	622	650	500
300	12"	698	850	550



正拓阀门
ZHENG TUO VALVE

营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.
●●●●●●●●




营造国际品牌/构筑百年企业
Construct international brand, build
hundred years enterprise.
●●●●●●●●

正拓阀门
ZHENG TUO VALVE

美日标止回阀10K 150LB

American and Japanese standard Check Valve 10K 150LB

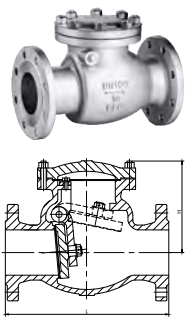


零件Part Name	材料Material		DN	NPS	L	H
螺母Nut	8	8	50	2"	203	145
螺栓Blot	B8	B8	65	2-1/2"	216	155
阀盖Bonnet	CF8	CF8M	80	3"	241	170
垫片Gasket	PTFE	PTFE	100	4"	292	200
PIN	304	316	125	5"	330	215
阀体Body	CF8	CF8M	150	6"	356	230
阀瓣Disc	CF8	CF8M	200	8"	495	285
Arm	CF8	CF8M	250	10"	622	295
螺母Nut	304	316	300	12"	698	335

设计与制造标准 Manufacturing standard	ASME B16.34	JIS B2071
结构长度标准 Length standard	ASME B16.10	JIS B2002
法兰连接标准 Connection standard	ASME B16.5	JIS B2220
检验与试验标准 Inspection and test standards	API 598	JIS B2003

Y型过滤器

Y-type filter

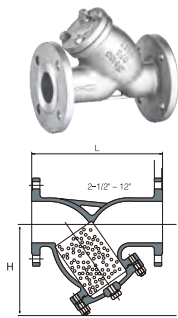

零件Part Name	材料Material	
阀体Body	CF8	CF8M
阀盖Bonnet	CF8	CF8M
垫片Gasket	PTFE	PTFE
过滤器Strainer	SS304	SS316

SIZE	L	H
2"	216	110
2-1/2"	250	155
3"	280	165
4"	305	200
5"	343	230
6"	388	250
8"	488	325
10"	545	385
12"	610	440

Size: 2"-12"
Material: WCB, CF8, CF8M, CF3, CF3M
Flange Dimensions: 2220.
Nominal Pressure: JIS-10K 150LB~30
Suitable Temperature: -20-232
Suitable Medium: Water, Oil, Gas And Some
Corrosive Liquid

水用减压阀

water pressure reducing valve



零件Part Name	材料Material	
阀体Body	CF8	CF8M
阀盖Bonnet	CF8	CF8M
Film	NBR/VITON	NBR/VITON
阀杆Stem	CF8	CF8M
阀座Seat	NBR/VITON	NBR/VITON
Spring	SS304	SS304
螺栓Bolt	SS304	SS304
压盖法兰Plug screw	CF8	CF8M

DN	L	H
15	87.5	128
20	87.5	128
25	100	135
32	135	160
40	135	160
50	141	170

Size: 1/2~2
Material: CF8 CF8M
Nominal Pressure: JIS 10K
Thread Type: NPT, BSPT, BSP, DIN 259/2999
Pressure adjustment range 0.7-4.0KG/CM
Suitable Temperature: Normal atmospheric
temperature
Suitable Medium: Water

水锤吸纳器

Water hammer arrester




零件Part Name	材料Material	
阀体Body	CF8	CF8M
Piston	CF8	CF8M
O型圈 O type ring	NBR/VITON	NBR/VITON

SIZE	D	B	H
2"	165	30	250
2-1/2"	175	30	300
3"	185	35	360
4"	210	35	430
5"	250	40	540
6"	280	40	620
8"	330	40	740

Size: 2-8 DN15-DN300
Material: CF8 CF8M
Nominal Pressure: JIS10K 20K PN16 PN25
Thread Type: NPT, BSPT.
Suitable Temperature: Normal atmospheric temperature
Flange Dimensions: JIS B2212: JIS B2214
absorbing capacity 10.5kgf/cm
Suitable Medium: Water

日标拉柄式底阀

Japanese standard pull-handle bottom valve




零件Part Name	材料Material		DN	NPS	L	W
螺栓Blot	B8	B8	50	2"	215	170
Plate	CF8	CF8M	65	2-1/2"	215	172
Screen	304	316	80	3"	215	205
垫圈杆 washer Lever	CF8	CF8M	100	4"	235	230
阀座Seat	EPDM	EPDM	125	5"	267	240
Disc	CF8	CF8M	150	6"	277	305
填料Spring	304	316	200	8"	392	330
阀盖Bonnet	CF8	CF8M				
阀体Body	CF8	CF8M				

设计与制造标准 Manufacturing standard	ASME B16.34	JIS B2071
结构长度标准 Length standard	ASME B16.10	JIS B2002
法兰连接标准 Connection standard	ASME B16.5	JIS B2220
检验与试验标准 Inspection and test standards	API 598	JIS B2003

包胶对夹止回阀10K

Coated clamp check valve 10K




零件Part Name	材料Material	
Rubber hose		EPDM
Pin		304
Spring		304
Disc		CF8
阀体Body		CF8+EPDM

DN	NPS	L	d	D
50	2"	59	52	101
65	2-1/2"	60	55	119
80	3"	61	70	130
100	4"	71	90	156
125	5"	77	114	186
150	6"	81	141	215
200	8"	101	190	268

两片式球阀

Two- piece ball valve




零件Part Name	材料Material		
手柄HandLe	201	201	201
填料Packing	PTFE	PTFE	PTFE
阀杆Stem	304	304	316
阀盖Bonnet	WCB	CF8	CF8M
垫片Gasket	PTFE	PTFE	PTFE
球体Ball	304	304	316
阀座Seat	PTFE	PTFE	PTFE
阀体Body	WCB	CF8	CF8M

DN	NPS	L	H	W
15	1/2"	53.5	53	95
20	3/4"	61.5	61	116
25	1"	73	64	116
32	1-1/4"	87.5	72	140
40	1-1/2"	96	91	180
50	2"	108.5	100	180
65	2-1/2"	150	125	215
80	3"	180	135	255

旋启式螺纹止回阀

Swing thread check valve



零件Part Name	材料Material	
阀盖Bonnet	CF8	CF8M
垫片Gasket	PTFE	PTFE
阀体Body	CF8	CF8M
Disc	CF8	CF8M

零件Part Name	材料Material	
Spring	304	316
阀体Body	CF8	CF8M
Disc	CF8	CF8M
阀盖Bonnet	CF8	CF8M
垫片Gasket	PTFE	PTFE

DN	NPS	L	H
15	1/2"	65	42
20	3/4"	80	53
25	1"	90	60
32	1-1/4"	104	63
40	1-1/2"	120	75
50	2"	140	82




法兰尺寸表


Flange size table

法兰尺寸表


Flange size table

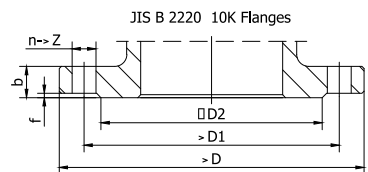


DN	NPS	D	D1	D2	b	f	n-Z
15	1/2"	95	70	51	12	1	4-15
20	3/4"	100	75	56	14	1	4-15
25	1"	125	90	67	14	1	4-19
32	1-1/4"	135	100	76	16	2	4-19
40	1-1/2"	140	105	81	16	2	4-19
50	2"	155	120	96	16	2	4-19
65	2-1/2"	175	140	116	18	2	4-19
80	3"	185	150	126	18	2	8-19
100	4"	210	175	151	18	2	8-19
125	5"	250	210	182	20	2	8-23
150	6"	280	240	212	22	2	8-23
200	8"	330	290	262	22	2	12-23
250	10"	400	355	324	24	2	12-25
300	12"	445	400	368	24	3	16-25

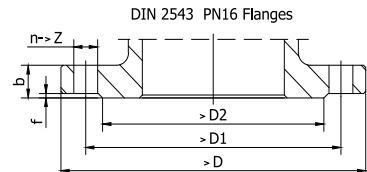


DN	NPS	D	D1	D2	b	f	n-Z
15	1/2"	95	65	45	16	2	4-14
20	3/4"	105	75	58	18	2	4-14
25	1"	115	85	68	18	2	4-14
32	1-1/4"	140	100	78	18	2	4-18
40	1-1/2"	150	110	88	18	3	4-18
50	2"	165	125	102	20	3	4-18
65	2-1/2"	185	145	122	18	3	4-18
80	3"	200	160	138	20	3	8-18
100	4"	220	180	158	20	3	8-18
125	5"	250	210	188	22	3	8-18
150	6"	285	240	212	22	3	8-22
200	8"	340	295	268	24	3	12-22
250	10"	405	355	320	26	3	12-26
300	12"	460	410	378	28	4	12-26

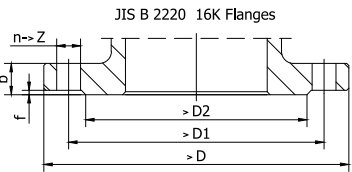


DN	NPS	D	D1	D2	b	f	n-Z
15	1/2"	95	70	51	12	1	4-15
20	3/4"	100	75	56	14	1	4-15
25	1"	125	90	67	14	1	4-19
32	1-1/4"	135	100	76	16	2	4-19
40	1-1/2"	140	105	81	16	2	4-19
50	2"	155	120	96	16	2	8-19
65	2-1/2"	175	140	116	18	2	8-19
80	3"	200	160	132	20	2	8-23
100	4"	225	185	160	22	2	8-23
125	5"	270	225	195	22	2	8-25
150	6"	305	260	230	24	2	12-25
200	8"	350	305	275	26	2	12-25
250	10"	430	380	345	28	2	12-27
300	12"	480	430	395	30	3	16-27

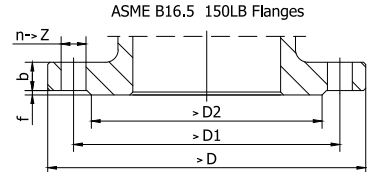

DN	NPS	D	D1	D2	b	f	n-Z
15	1/2"	90	60.3	34.9	8.0	2	4-16
20	3/4"	100	69.9	42.9	8.9	2	4-16
25	1"	110	79.4	50.8	9.6	2	4-16
32	1-1/4"	115	88.9	63.5	11.2	2	4-16
40	1-1/2"	125	98.4	73.0	12.7	2	4-16
50	2"	150	120.7	92.1	14.3	2	4-19
65	2-1/2"	180	139.7	104.8	15.9	2	4-19
80	3"	190	152.4	127.0	17.5	2	4-19
100	4"	230	190.5	157.2	22.3	2	8-19
125	5"	255	215.9	185.7	22.3	2	8-22
150	6"	280	241.3	215.9	23.9	2	8-22
200	8"	345	298.5	269.9	27	2	8-22
250	10"	405	362.0	323.8	28.6	2	12-25
300	12"	485	431.8	381.0	30.2	2	12-25

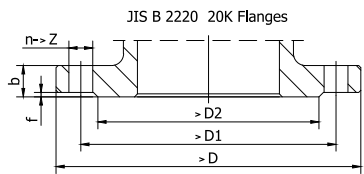

DN	NPS	D	D1	D2	b	f	n-Z
15	1/2"	95	70	51	14	1	4-15
20	3/4"	100	75	56	16	1	4-15
25	1"	125	90	67	16	1	4-19
32	1-1/4"	135	100	76	18	2	4-19
40	1-1/2"	140	105	81	18	2	4-19
50	2"	155	120	96	18	2	8-19
65	2-1/2"	175	140	116	20	2	8-19
80	3"	200	160	132	22	2	8-23
100	4"	225	185	160	24	2	8-23
125	5"	270	225	195	26	2	8-25
150	6"	305	260	230	28	2	12-25
200	8"	350	305	275	30	2	12-25
250	10"	430	380	345	34	2	12-27
300	12"	480	430	395	36	3	16-27

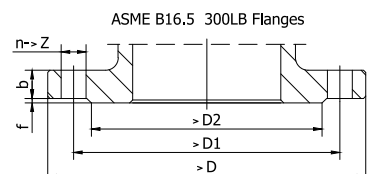

DN	NPS	D	D1	D2	b	f	n-Z
15	1/2"	95	66.7	34.9	12.7	2	4-16
20	3/4"	115	82.6	42.9	14.3	2	4-19
25	1"	125	88.9	50.8	15.9	2	4-19
32	1-1/4"	135	98.4	63.5	17.5	2	4-19
40	1-1/2"	155	114.3	73.0	19.1	2	4-22
50	2"	165	127.0	92.1	20.7	2	8-19
65	2-1/2"	190	149.2	104.8	23.9	2	8-22
80	3"	210	168.3	127.0	27.0	2	8-22
100	4"	255	200.0	157.2	30.2	2	8-22
125	5"	280	235.0	185.7	33.4	2	8-22
150	6"	320	269.9	215.9	35.0	2	12-22
200	8"	380	330.2	269.9	39.7	2	12-25
250	10"	445	387.4	323.8	46.1	2	16-29
300	12"	520	450.8	381.0	49.3	2	16-32